

13.

EMOTIONS 4V

1285 x 280 mm



ABRASION
CLASS



USAGE
CLASS



GUARANTEE



THICKNESS



4-SIDED
BEVEL



SYNCHRONOUS
SURFACE



RESIST SPILLS
UP TO 48H



Emotions 4V Helmond Oak



Helmond Oak 62492
1285 x 280 x 8 mm / str. synchro



Nebraska Oak 62493
1285 x 280 x 8 mm / str. synchro



Durango Oak 62494
1285 x 280 x 8 mm / str. synchro



Emotions 4V Canberra Oak



Villach Oak 62495
1285 x 280 x 8 mm / str. synchro




Ardesia Oak 62496
1285 x 280 x 8 mm / str. synchro



Caldo Oak 62500
1285 x 280 x 8 mm / str. synchro



Predi Oak 62501
1285 x 280 x 8 mm / str. synchro

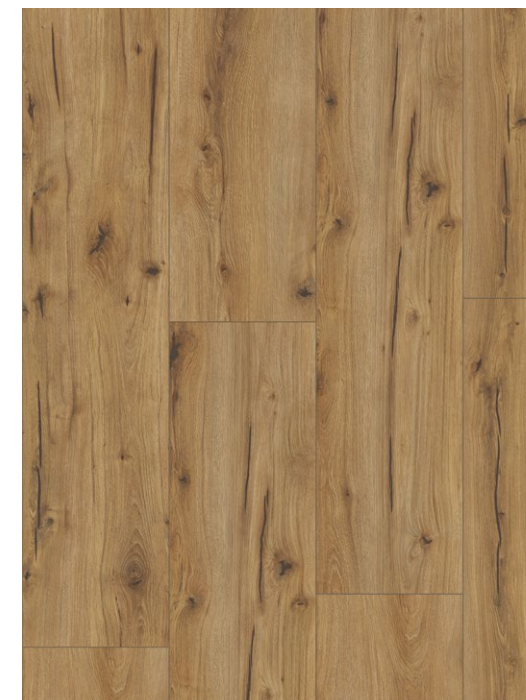

Canberra Oak 62502
1285 x 280 x 8 mm / str. synchro



Caluri Oak 62503
1285 x 280 x 8 mm / str. synchro