



CERRAD X LAMANIA HOME CERRAD X LAMANIA HOME

Inspiration | CEPPO NUOVO




It was

It was this beauty that inspired the creation of the Ceppo Nuovo – a collection that meticulously reflects the beauty of Italian bedrock.

/ Ceppo Nuovo SILVER



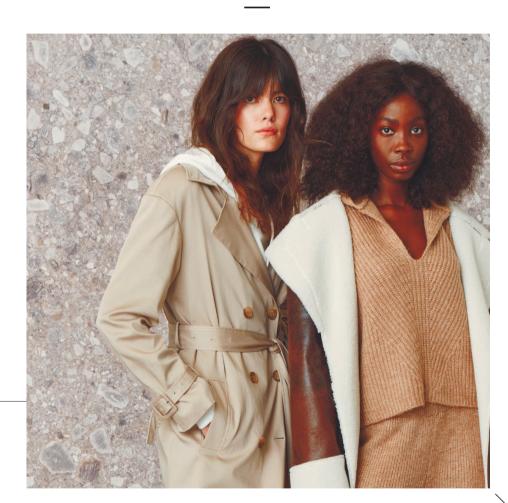

78

CERRAD X LAMANIA HOM


Inspiration | CEPPO NUOVO



77

It doesn't take a lot to find yourself in a suitable place and in the right atmosphe

/ Ceppo Nuovo GRAPHITI



/ Ceppo Nuovo SILVEK




CERRAD X LAMANIA HOME





Inspiration | CEPPO NUOVO








77

It inspires, gives start to something new, influences creative thinking...

CERRAD X LAMANIA HOME

Inspiration | CEPPO NUOVO

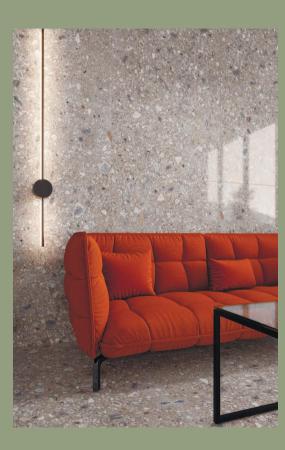

7

Ceppo Nuovo complements tasteful interiors, can be a ba and a backdrop, that wows and stimulates the senses.

/ Ceppo Nuovo SILVEK



CERRAD X LAMANIA HOME




CERRAD X LAMANIA HOME CERRAD X LAMANIA HOME

Inspiration | CEPPO NUOVO



When looking for inspiration, look no further... You'll find the ideal shade, which will allow you to create a perfect backdrop, that fits your character.

/ Ceppo Nuovo SILVER





CERRAD X LAMANIA HOME

Inspiration | CEPPO NUOVO



/ Ceppo Nuovo BLACK



ERRAD X LAMANIA HOM



CERRAD X LAMANIA HOME CERRAD X LAMANIA HOME



CEPPO NUOVO | collection

/ Silver


MATT POLISHED

PEI •••• / R9

PEI ••••

½ 12 / 蠎 0,6



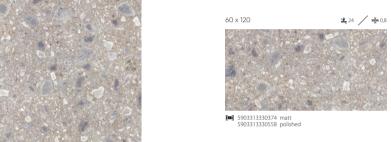





5903313330497 matt 5903313330671 polished

5903313330435 matt 5903313330619 polished

120 x 120

¼ 12 - number of graphic patterns


CERRAD X LAMANIA HOME CERRAD X LAMANIA HOME

CEPPO NUOVO | collection



5903313330398 matt 5903313330572 polished



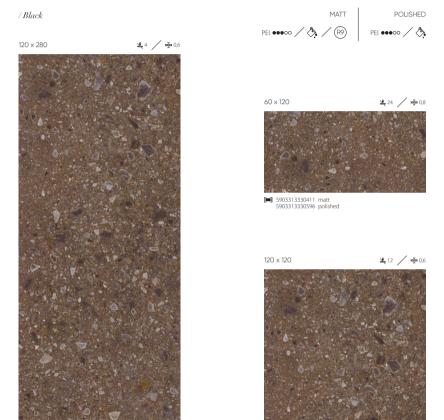

5903313330473 matt 5903313330657 polished


5903313330510 matt 5903313330695 polished

CERRAD X LAMANIA HOME

DIMENSIONS AND PACKAGING

	Dimensions [cm]	Pieces in the box	m² in the box	Packaging weight [kg]	m² / pcs on a pallet	Boxes on a pallet	Pallet weight [kg]	Frost resistance
	59,7x119,7x0,8	2	1,43	27,31	47,19	33	901,2	·
RECTIFIED TILE	119,7x119,7x0,6	2	2,87	42,60	68,88	24	1022,4	
	79,7x79,7x0,8	2	1,27	24,26	60,96	48	1164,5	
	79,7x159,7x0,8	1	1,27	24,26	50,80	40	970,4	

	Dimensions [cm]	Pieces on a pallet	m² on a pallet	Pallet weight [kg]	Pallet dimensions [mm]	Frost resistance
A-FRAME	1107.0707.06	38	127,3	1980	2900x1479x750	,
PALLET	119,7x279,7x0,6	25	83,75	1340	3030x1360x380	

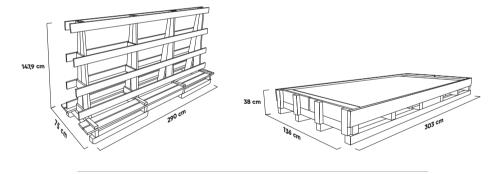

This catalogue does not constitute an offer as defined in the Civil Code provisions. The actual appearance of tiles may differ from that presented in the pictures contained herein.

All rights reserved © CERRAD Sp. z o.o. 2022.

HELD CERTIFICATES: compliance with PN-EN 14411:2013-04; for safety B ; EN ISO 9001; EN ISO 14001.



CERRAD X LAMANIA HOME

TECHNICAL PROPERTIES AND STANDARDS

VALUES ACCORDING TO THE STANDARD: PN - EN 14411:2013-04 ANNEX G AND DECLARED - PORCELAIN TILE

DIMENSIONS AND SURFACE FLATNESS		NOMINAL DIMENSION N		
		7 cm ≤ N < 15	N ≥ 15 cm	
tests according to PN-EN ISO 10545-2	length	± 0,9 mm	\pm 0,6% and max \pm 2,0 mm	
	width	± 0,9 mm	\pm 0,6% and max \pm 2,0 mm	
	thickness	± 0,5 mm	± 5% and max ± 0,5 mm	
	deflection from the straight angle	± 0,75 mm	\pm 0,5% and max \pm 2,0 mm	
	surface flatness	± 0,75 mm	± 0,5% and max ± 2,0 mm	

		PN – EN 14411:2013-04 ANNEX G and declared			
	PHYSICAL PROPERTIES	REQUIREMENTS	MEAN VALUE ACHIEVED		
<u>*</u>	Water absorption, tests according to PN-EN ISO 10545-3	E ≤ 0,5%	0,05% - 0,10%		
&	Breaking force, tests according to PN-EN ISO 10545-4	for thickness < 7.5 mm $- \ge 700$ N for thickness ≥ 7.5 mm $- \ge 1300$ N	1300-1500 N 2000-2200 N		
•	Flexural strength, tests according to PN-EN ISO 10545-4	> 35 N/mm²	40-50 N/mm²		
•	Abrasion resistance, tests according to PN-EN ISO 10545-7	according to the manufacturer's declaration	cl. 3 – 4		
*	Frost resistance, tests according to PN-EN ISO 10545-12	required	resistant		
	Chemical resistance, tests according to PN-EN ISO 10545-13, – to acids and bases of low concentration, – to acids and bases of high concentration, – to household agents/water pool salts	according to the manufacturer's classification – min. B	– LA – HA – A		
	Non-slip qualities, tests according to DIN 51130 + complementary procedures	according to the manufacturer's declaration	smooth and rustic surface – R9		
	Release of lead and cadmium PN-EN ISO 10545-15	requirements of the Commission directive 2005/31/EC ≤ 0,2 mg/l for lead ≤ 0,02 mg/l for cadmium	Lead < 0,1 mg/dm³ Cadmium < 0,02 mg/dm³		
•	Natural radioactivity ITB 455/2010	no requirements	below regulatory safety limits		
*	Resistance to staining PN-EN ISO 10545-14	min. 3 cl. (GL)	cl. 5		
X	Crazing resistance, tests according to PN-EN ISO 10545-11	required	resistant		
%	Thermal shock resistance, test according to PN-EN ISO 10545-9	required	resistant		