




Pool: Bali Kuta Matt


S-tile

BALI

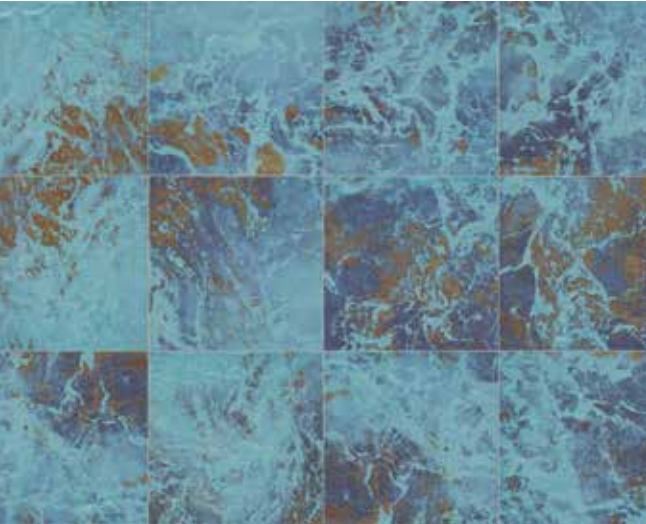

***BALI CANGGU**
100340693

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO

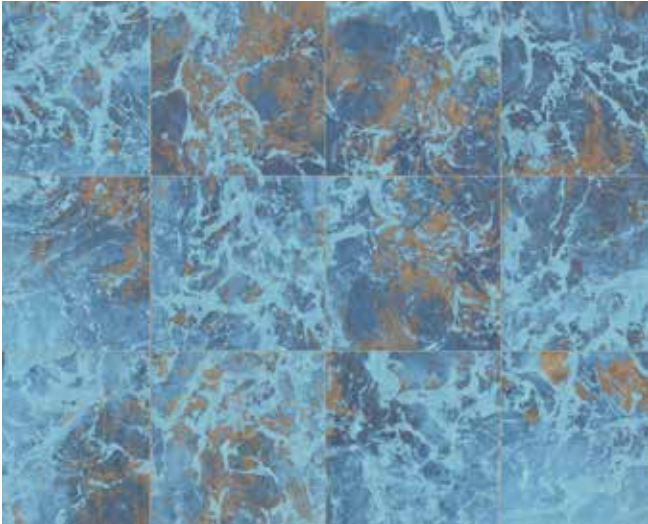

BALI CANGGU MATT
100340694

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO



***BALI DENPASAR**
100340695

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO



BALI DENPASAR MATT
100340696

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO



***BALI JIMBARAN**
100340697

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO



BALI JIMBARAN MATT
100340698

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO


DESCRIPTION	FORMAT	GROUP	PCS	M²	KG	ICONS
Bali	14,7cm x 14,7cm x 0,85cm 5 25/32" x 5 25/32" x 11/32"	G-226	14 x Cj 2520 x Pal	0,3 x Cj 54,45 x Pal	5,96 x Cj 1073,5 x Pal	
Bali Matt	14,7cm x 14,7cm x 0,85cm 5 25/32" x 5 25/32" x 11/32"	G-226	14 x Cj 2520 x Pal	0,3 x Cj 54,45 x Pal	5,92 x Cj 1065,9 x Pal	

*For swimming pools, follow the installation and maintenance instructions, as well as the instructions of the recommended SUPER FLEX S2 adhesive and EPOTECH AQUA grout. In these applications you must waterproof the substrate, install a minimum joint of 5 mm, and also install expansion joints. In accordance with the requirements of the CTE, this ceramic cannot be installed in areas intended for barefoot users and at the bottom of pool vessels, in areas where the depth is less than 1.50 m.

*Para piscina, siga las instrucciones de instalación y mantenimiento, así como las instrucciones del adhesivo SUPER FLEX S2, y rejunte EPOTECH AQUA recomendados. Es necesario en estas aplicaciones la impermeabilización del soporte, colocación de una junta mínima de 5mm, así como de juntas de dilatación. Atendiendo a los requisitos recogidos en el CTE, esta cerámica no se puede colocar en zonas previstas para usuarios descalzos y en el fondo de los vasos, en las zonas en las que la profundidad sea inferior a 1,50 m.


*Pour une piscine, veuillez suivre les instructions de pose et d'entretien, ainsi que les consignes du mortier-colle SUPER FLEX S2 et jointoiement EPOTECH AQUA recommandés. Pour ce type d'utilisation, il est nécessaire d'imperméabiliser le support, en prévoyant un joint minimum de 5 mm, et la mise en place de joints de dilatation. Conformément aux exigences énoncées dans le CTE, ce carrelage ne peut pas être posé dans les zones destinées aux usagers pieds nus et dans le fond des bassins, là où la profondeur est inférieure à 1,50 m.

BALI

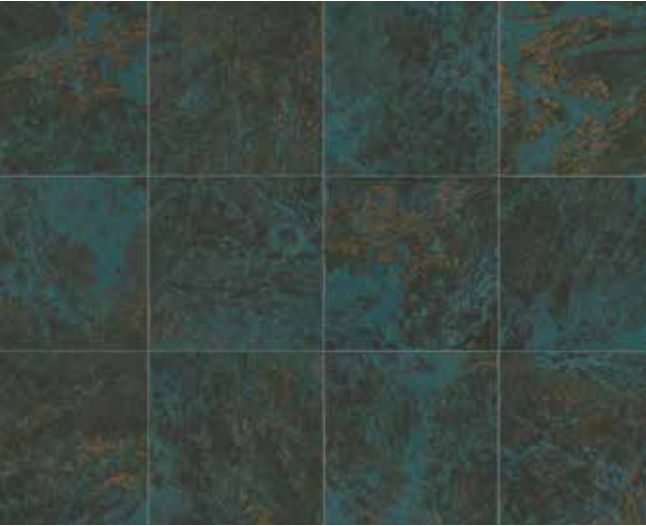


***BALI KUTA**
100340699

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO

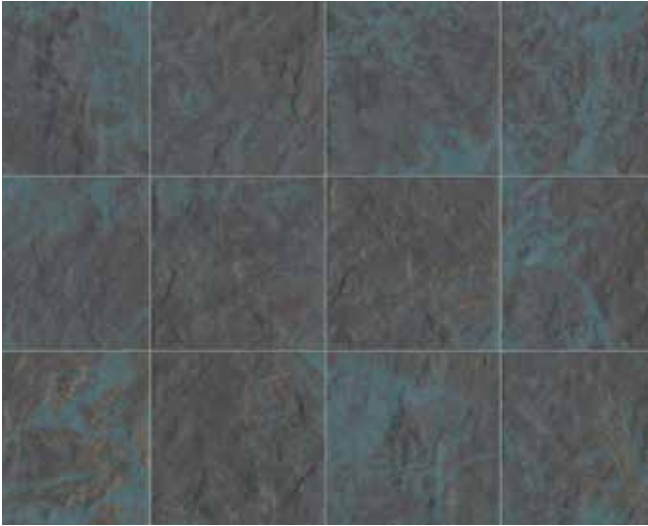

BALI KUTA MATT
100340700

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO



***BALI NEGARA**
100340701

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO



BALI NEGARA MATT
100340702

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO



***BALI UBUD**
100340703

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO



BALI UBUD MATT
100340704

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO

DESCRIPTION	FORMAT	GROUP	PCS	M²	KG	ICONS
Bali	14,7cm x 14,7cm x 0,85cm 5 25/32" x 5 25/32" x 11/32"	G-226	14 x Cj 2520 x Pal	0,3 x Cj 54,45 x Pal	5,96 x Cj 1073,5 x Pal	
Bali Matt	14,7cm x 14,7cm x 0,85cm 5 25/32" x 5 25/32" x 11/32"	G-226	14 x Cj 2520 x Pal	0,3 x Cj 54,45 x Pal	5,92 x Cj 1065,9 x Pal	

*For swimming pools, follow the installation and maintenance instructions, as well as the instructions of the recommended SUPER FLEX S2 adhesive and EPOTECH AQUA grout. In these applications you must waterproof the substrate, install a minimum joint of 5 mm, and also install expansion joints. In accordance with the requirements of the CTE, this ceramic cannot be installed in areas intended for barefoot users and at the bottom of pool vessels, in areas where the depth is less than 1.50 m.

*Para piscina, siga las instrucciones de instalación y mantenimiento, así como las instrucciones del adhesivo SUPER FLEX S2, y rejunte EPOTECH AQUA recomendados. Es necesario en estas aplicaciones la impermeabilización del soporte, colocación de una junta mínima de 5mm., así como de juntas de dilatación. Atendiendo a los requisitos recogidos en el CTE, esta cerámica no se puede colocar en zonas previstas para usuarios descalzos y en el fondo de los vasos, en las zonas en las que la profundidad sea inferior a 1,50 m.

*Pour une piscine, veuillez suivre les instructions de pose et d'entretien, ainsi que les consignes du mortier-colle SUPER FLEX S2 et jointoiment EPOTECH AQUA recommandés. Pour ce type d'utilisation, il est nécessaire d'imperméabiliser le support, en prévoyant un joint minimum de 5 mm, et la mise en place de joints de dilatation. Conformément aux exigences énoncées dans le CTE, ce carrelage ne peut pas être posé dans les zones destinées aux usagers pieds nus et dans le fond des bassins, là où la profondeur est inférieure à 1,50 m.

CUZCO



CUZCO DUAL BONE
100363676

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO



CUZCO BONE
100363675

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO



CUZCO LIGHT
100363672

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO



CUZCO DUAL WHITE
100363674

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO




CUZCO WHITE
100363673

Recommended Joint:
COLORSTUK RAPID GRIS N
Recommended Adhesive:
ONE-FLEX PREMIUM BLANCO

FORMAT	GROUP	PCS	M²	KG	ICONS
20cm x 23,2cm x 0,85cm 7 7/8" x 9 17/128" x 11/32"	G-227	18 x Cj 1728 x Pal	0,835 x Cj 80,18 x Pal	11,36 x Cj 1090,37 x Pal	      



Wall Covering: Cuzco Light, Cuzco Bone

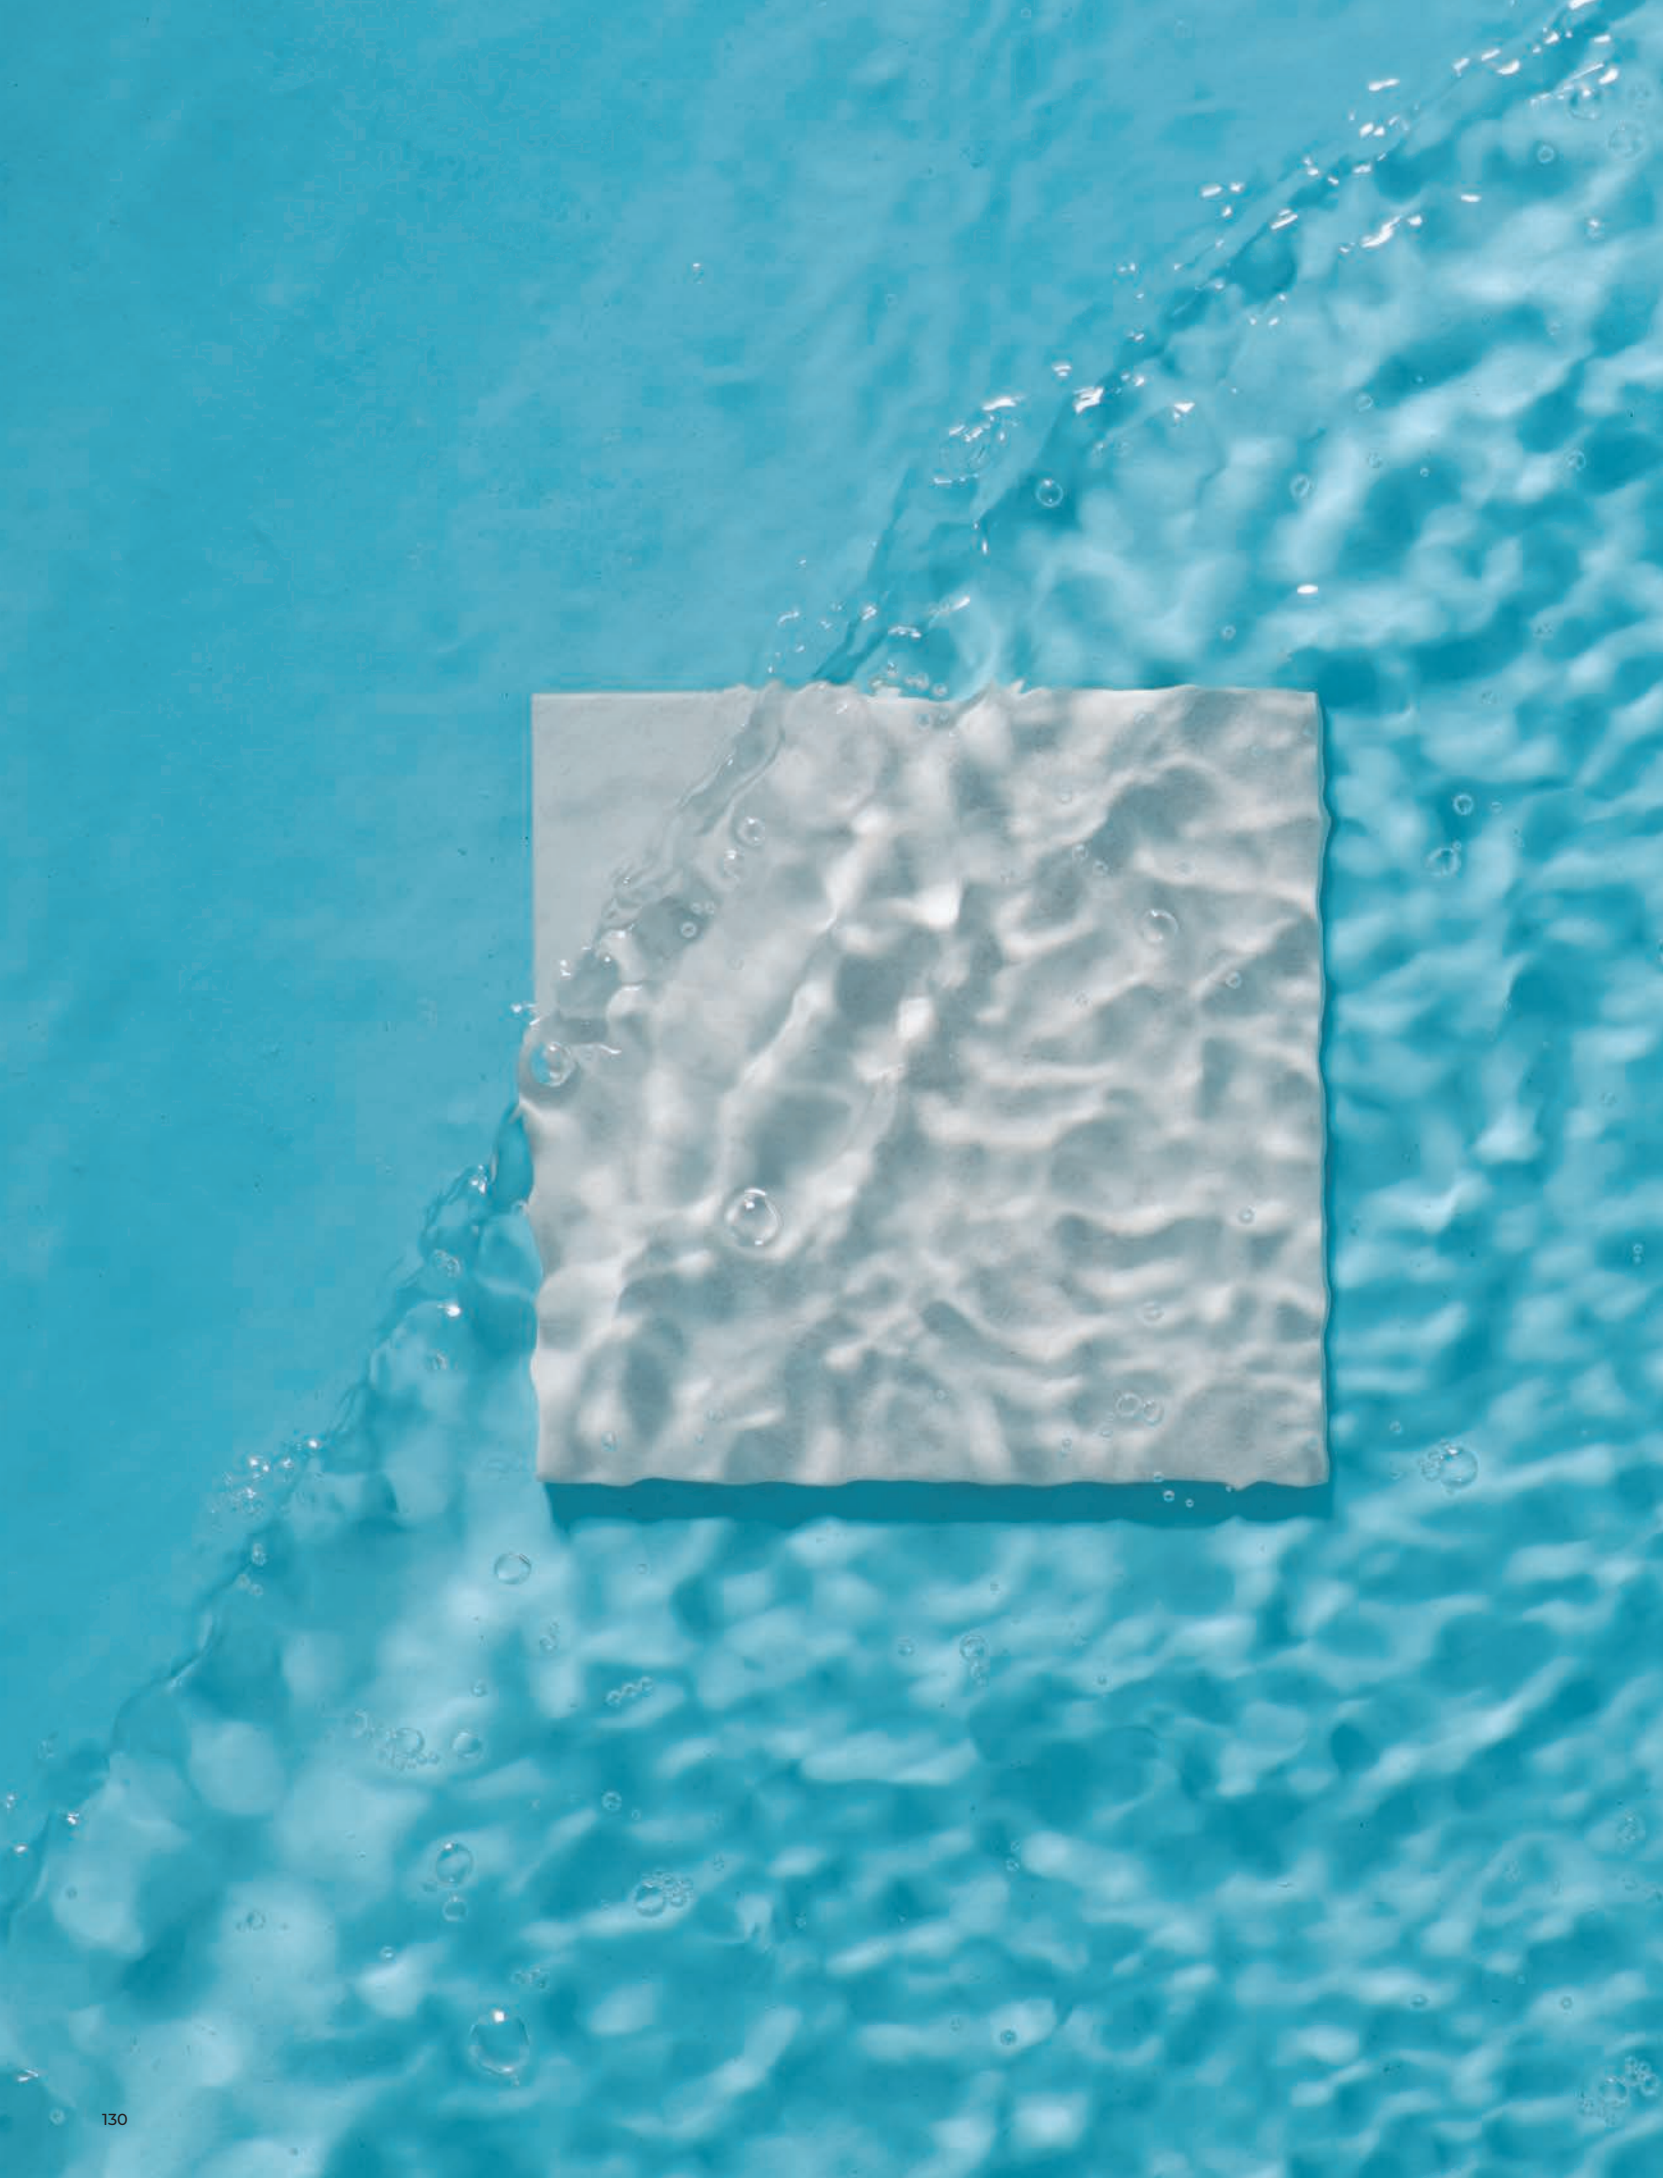

BALI

Canggu · Canggu Matt · Denpasar · Denpasar Matt
Jimbaran · Jimbaran Matt · Kuta · Kuta Matt
Negara · Negara Matt · Ubud · Ubud Matt

BALI, design inspired by nature. Irregular ceramic with a high contrast that offers a fun and elegant graphic richness.

Its natural look and variety of textures evoke different seabeds, creating a natural environment and a sophisticated atmosphere. Its vivid colors full of shade variation create a great sensation of depth, distancing itself from traditional ceramics.

BALI, diseño inspirado en la naturaleza. Cerámica irregular con un alto contraste que ofrece una riqueza gráfica divertida y elegante.

Su aspecto natural y la variedad de texturas evocan a diferentes fondos marinos, creando un entorno natural y un ambiente sofisticado. Sus vivos colores llenos de variación tonal provocan gran sensación de profundidad, distanciándose de la cerámica tradicional.

BALI, un design inspiré par la nature. Céramique irrégulière à fort contraste qui offre une richesse graphique amusante et élégante.

Son aspect naturel et la variété de ses textures évoquent différents fonds marins, créant un environnement naturel et une atmosphère sophistiquée. Ses couleurs vives, aux variations de tons, provoquent une grande sensation de profondeur, se démarquant ainsi de la céramique traditionnelle.





Pool Bali Kuta Matt



Pool Bali Canggu Matt





Pool Bali Ubud Matt