

Beauty full of contrasts

**With class, but modern.
Minimalistic, but impressive. There you go!**

It allures with the bustle of eclectic streets, flirts, permeating the sounds of nightlife through the air, distanced by the cold, concrete grayness one minute, only to a moment later, amaze with the blinding glow of neon lights or to calm the senses with the greenery emerging from between the buildings. New York – the Big Apple – a city with tastes that differ according to palate.

03



Inspiration

MODERN
CONCRETÉ

Inspiration | MODERN CONCRETE



/ Modern Concrete SILVER





”

Nothing here is unequivocal and transparent. The timeless gray stands against the beige and loses itself in the tranquil white.

/ Modern Concrete SILVER



Inspiration | MODERN CONCRETE



”

A synonym for class, timelessness and effortless elegance. You earned some peace and quiet.

/ Modern Concrete GRAPHITE





Inspiration | MODERN CONCRETE



/ Modern Concrete GRAPHITE





Inspiration | MODERN CONCRETE

/Modern Concrete IVORY




Inspiration | MODERN CONCRETE



”

Structures, everchanging like New York's essence, give practically boundless design alternatives.

/ Brazilian Quartzite BLUE



/ Modern Concrete IVORY






MODERN CONCRETE | collection

/Ivory

MATT | LAPPATO SILKY CRISTAL
PEI ●●●●○ / (R9) | PEI ●●●●○


120 x 280  4 /  0,6



 5903313332163 matt
5903313331920 lappato silky cristal

80 x 160

 24 /  0,8

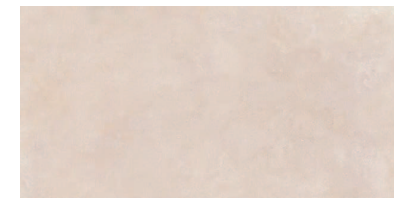

 5903313332040 matt
5903313331807 lappato silky cristal

120 x 120

 12 /  0,6




 5903313332101 matt
5903313331869 lappato silky cristal

80 x 80

 48 /  0,8



 5903313331982 matt
5903313331746 lappato silky cristal

MODERN CONCRETE | collection

/Silver

MATT | LAPPATO SILKY CRISTAL
PEI ●●●●○ / (R9) | PEI ●●●●○

120 x 280 4 / 0,6



5903313332187 matt
5903313331944 lappato silky cristal

80 x 160 24 / 0,8



5903313332064 matt
5903313331821 lappato silky cristal

120 x 120 12 / 0,6



5903313332125 matt
5903313331883 lappato silky cristal

80 x 80 48 / 0,8



5903313332002 matt
5903313331760 lappato silky cristal

/Graphite

MATT | LAPPATO SILKY CRISTAL
PEI ●●●●○ / (R9) | PEI ●●●●○

120 x 280 4 / 0,6



5903313332200 matt
5903313331968 lappato silky cristal

80 x 160 24 / 0,8



5903313332088 matt
5903313331845 lappato silky cristal

120 x 120 12 / 0,6



5903313332149 matt
5903313331906 lappato silky cristal

80 x 80 48 / 0,8




5903313332026 matt
5903313331784 lappato silky cristal

DIMENSIONS AND PACKAGING

	Dimensions [cm]	Pieces in the box	m ² in the box	Packaging weight [kg]	m ² / pcs on a pallet	Boxes on a pallet	Pallet weight [kg]	Frost resistance
RECTIFIED TILE	59,7x119,7x0,8	2	1,43	27,31	47,19	33	901,2	✓
	119,7x119,7x0,6	2	2,87	42,60	68,88	24	1022,4	
	79,7x79,7x0,8	2	1,27	24,26	60,96	48	1164,5	
	79,7x159,7x0,8	1	1,27	24,26	50,80	40	970,4	

	Dimensions [cm]	Pieces on a pallet	m ² on a pallet	Pallet weight [kg]	Pallet dimensions [mm]	Frost resistance
A-FRAME	119,7x279,7x0,6	38	127,3	1980	2900x1479x750	✓
PALLET		25	83,75	1340	3030x1360x380	

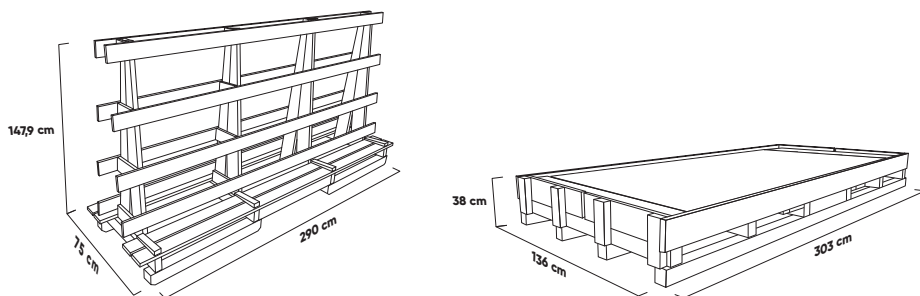

This catalogue does not constitute an offer as defined in the Civil Code provisions. The actual appearance of tiles may differ from that presented in the pictures contained herein.













All rights reserved © CERRAD Sp. z o.o. 2022.

HELD CERTIFICATES: compliance with PN-EN 14411:2013-04; for safety  ; EN ISO 9001; EN ISO 14001.

TECHNICAL PROPERTIES AND STANDARDS

VALUES ACCORDING TO THE STANDARD: PN - EN 14411:2013-04 ANNEX G AND DECLARED – PORCELAIN TILE

tests according to PN-EN ISO 10545-2	DIMENSIONS AND SURFACE FLATNESS	NOMINAL DIMENSION N	
		7 cm ≤ N < 15	N ≥ 15 cm
	length	± 0,9 mm	± 0,6% and max ± 2,0 mm
width	± 0,9 mm	± 0,6% and max ± 2,0 mm	
thickness	± 0,5 mm	± 5% and max ± 0,5 mm	
deflection from the straight angle	± 0,75 mm	± 0,5% and max ± 2,0 mm	
surface flatness	± 0,75 mm	± 0,5% and max ± 2,0 mm	

PN – EN 14411:2013-04 ANNEX G and declared			
	PHYSICAL PROPERTIES	REQUIREMENTS	MEAN VALUE ACHIEVED
	Water absorption, tests according to PN-EN ISO 10545-3	E ≤ 0,5%	0,05% – 0,10%
	Breaking force, tests according to PN-EN ISO 10545-4	for thickness < 7,5 mm – ≥ 700 N for thickness ≥ 7,5 mm – ≥ 1300 N	1300-1500 N 2000-2200 N
	Flexural strength, tests according to PN-EN ISO 10545-4	> 35 N/mm ²	40-50 N/mm ²
	Abrasion resistance, tests according to PN-EN ISO 10545-7	according to the manufacturer's declaration	cl. 3 – 4
	Frost resistance, tests according to PN-EN ISO 10545-12	required	resistant
	Chemical resistance, tests according to PN-EN ISO 10545-13, – to acids and bases of low concentration, – to acids and bases of high concentration, – to household agents/water pool salts	according to the manufacturer's classification – min. B	– LA – HA – A
	Non-slip qualities, tests according to DIN 51130 + complementary procedures	according to the manufacturer's declaration	smooth and rustic surface – R9
	Release of lead and cadmium PN-EN ISO 10545-15	requirements of the Commission directive 2005/31/EC ≤ 0,2 mg/l for lead ≤ 0,02 mg/l for cadmium	Lead < 0,1 mg/dm ³ Cadmium < 0,02 mg/dm ³
	Natural radioactivity ITB 455/2010	no requirements	below regulatory safety limits
	Resistance to staining PN-EN ISO 10545-14	min. 3 cl. (GL)	cl. 5
	Crazing resistance, tests according to PN-EN ISO 10545-11	required	resistant
	Thermal shock resistance, test according to PN-EN ISO 10545-9	required	resistant