

RESTROOMS



FS Original

Sigle fired floor tiles



Colour Escape
London

Colour Escape
London



FS | FS NIJAR | FS-0

CARACTERÍSTICAS TÉCNICAS ANTIDESLIZAMIENTO | ANTI-SLIP CHARACTERISTICS

Ensayo Essay	Características Features	Resultado Result	
		0, 1, 2, 3, 4	NIJAR
DIN 51130	Ángulo crítico (Pies calzados) Critical angle (footwear)	R9	R10
DIN 51097	Ángulo crítico (Pies descalzos) Critical angle (Wet loaded barefoot)	-	A+B
BS-77976-2	Antideslizamiento (Test del péndulo) Slip resistance (Pendulum test)	+36 Wet	
UNE-ENV-12633	Antideslizamiento (Test del péndulo) Slip resistance (Pendulum test)	Class 1	Class 2
ANSI A.1371:2012	Coefficiente de Fricción Dinámico Dynamic Coefficient of Friction	-	>0,42
ISO 10545-7	Resistencia a la Abrasión Superficial/Resistance to Surface Abrasion	PEI 4	

APLICACIONES | APPLICATIONS

Área Area	Revestimiento Wall	Pavimento Floor	
	0, 1, 2, 3, 4	NIJAR	0, 1, 2, 3, 4
Interior Internal	✓	✓	✓
Exterior External	-	-	-
Comercial Commercial	✓	-	✓
Ducha Shower	✓	-	-

CARACTERÍSTICAS TÉCNICAS | TECHNICAL CHARACTERISTICS

joint 1,5 mm	versatile	matt	diferent shades
shade variation	various graphics	various moulds	

EMBALAJE | PACKING

Formato Sizes	Cajas Boxes			Pallet			Cont./20' 21500 kg.	Cont./20' 24000 kg.	
	Piezas	m ² /sq.m	kg	Cajas	m ² /sq.m	kg	Tamaño cm aprox.	m ² /sq.m	m ² /sq.m
cm 45 * 45 * 1,05	5	1,00	23,14	66	66,00	1552,24	102 * 80 * 105	914,16	1020,46
inch 17 3/4 * 17 3/4 * 7/16	5	10,76	50,91	66	710,42	3414,93	40 3/16 * 31 1/2 * 41 5/16	9839,96	10984,14




FS-0

13 patterns




FS-1

10 patterns

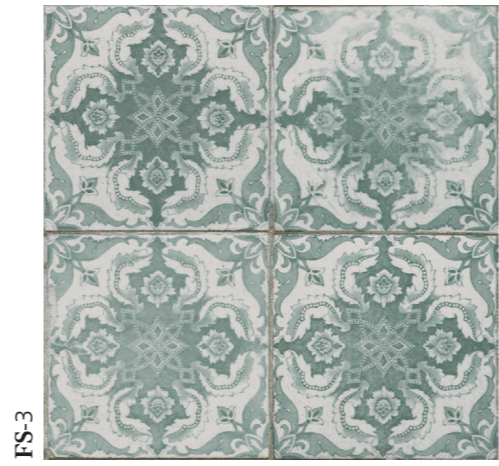

FS-3

8 patterns

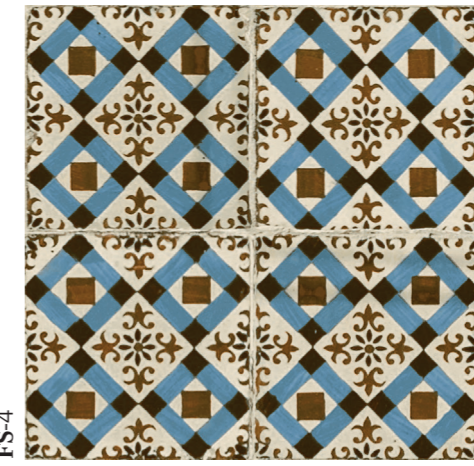

FS-4

5 patterns



FS-2


5 patterns



FS NIJAR

6 patterns

FS ORIGINAL




45 * 45 * 1,05 cm | 17 3/4 * 17 3/4 * 7/16"

NO RECTIFIED	NATURAL PRICE CODE BN14
FS-0	13305
FS-1	12500
FS-2	12501
FS-3	12519
FS-4	12541
FS NIJAR	20402

PIEZA COMPLEMENTARIA | COMPLEMENTARY PIECE

*Pedido mínimo 10 unidades | Minimum order 10 items

Rodapie - Skirting



R.

8 * 45 cm | 3 1/8 * 17 3/4" P8